




CLIMA-LINE

HVAC valve

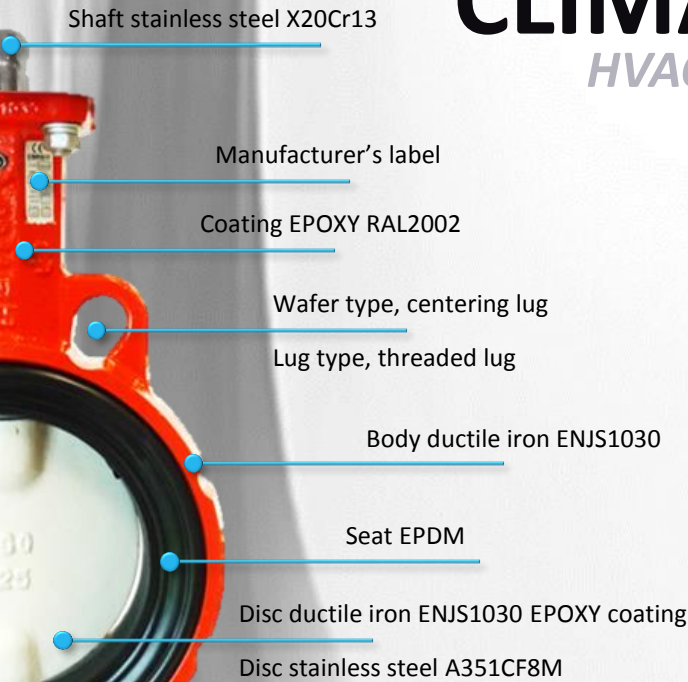

CONCEPTION
EN593 (03/98)
Top flange ISO 5211

FACE TO FACE
EN558-1 basic 20
ISO 5752 basic 20

THIGHTNESS
EN12266-1 rate A
ISO 5208 categorie A



RATING
EN 1092-1
EN1759-1

WORKING PRESSURE
DN032 to DN200 : 16 bar
DN250 to DN400 : 10 bar

WORKING TEMPERATURE

110°C
EPDM
-20°C

CERTIFICATION

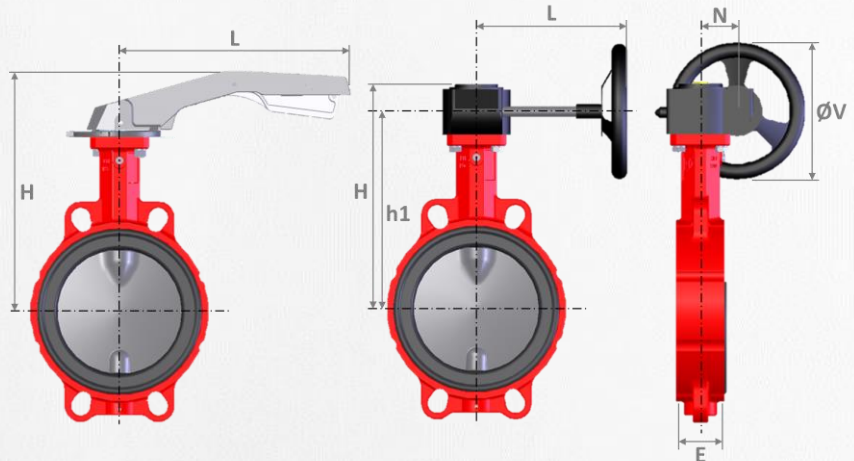

DN	32	40	50	65	80	100	125	150	200	250	300	350	400	
Face to face [E]	33	33	43	46	46	52	56	56	60	68	78	78	102	
Top flange	F05						F07			F10		F12		
Square	C11/45°					C14/45°			C17/45°	C22/45°		C27/45°		
Handlever	H	212	212	222	230	239	269	281	314	322	362			
	L	200	200	200	200	200	275	275	275	340	500	500		
	weight	Wafer	2,1	2,1	2,9	3,5	3,8	5	7,4	9	13,8	24,6	35,3	
		Lugs	2,7	2,7	3,5	5,4	6,5	9,2	10,8	16,1	31	42,6		
Gearbox	Model	AL232-06									AL232-08		AL232-13	
	H	195	195	205	212,5	222	231,5	251,5	264	293	337	394	409	449
	h1	163	163	173	180,5	190	199,5	219,5	232	261	298	349,5	364,5	404,5
	L					179					194		361	
	N					42,5					50		80	
	ØV					160					160		300	
	weight	Wafer	3,3	3,3	4	4,6	4,9	6	8,5	10	14,6	24,6	35,3	47,1
	Lugs	3,8	3,8	4,6	6,5	6	7,5	10,2	11,8	16,9	31	42,6	75,1	112

B VERSION	DN	32	40	50	65	80	100	125	150	200	250	300	350	400
	PN 10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PN 16	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
ASA 150	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
T VERSION	DN	32	40	50	65	80	100	125	150	200	250	300	350	400
	PN 10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PN 16	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

✓ : Standard ✓ : To be confirmed at the order